

SPRAY* *Away* *RDF

ICE MELTER

SPRAYAWAY RFD

Runway Deicing Fluid

...the best RDF on the market.

Technical Data Sheet

the best RDF on the market.

DESCRIPTION- SPRAYAWAY RDF

SPRAYAWAY RDF represents a significant improvement on potassium acetate deicing fluids designed for airport runway applications. The unique features and benefits of SPRAYAWAY RDF make it an ideal alternative to conventional potassium acetate fluids for applications requiring a high-performance, environmentally-friendly and low-corrosion deicing fluid. SPRAYAWAY RDF meets all FAA requirements of the SAE AMS 1435A specification for runway deicing fluids and is manufactured in a quality-controlled environment to ensure that product features and performance characteristics are consistently of the highest quality.


Improved Corrosion Inhibition. A unique multi-metal corrosion inhibitor package developed especially for use in KAc based fluids provides exceptional corrosion protection on all common aircraft metals, including magnesium and cadmium. Improved cadmium corrosion protection is of recent interest for KAc based products¹. In addition, the SPRAYAWAY RDF fluid also provides improved corrosion protection on other important metals not addressed by the AMS 1435A specification. Laboratory tests indicate that SPRAYAWAY RDF can substantially reduce corrosion of galvanized steel and copper. Compatibility with these metals is critical for airport runway operations, as the in-ground lighting fixtures used by most major airports are constructed from galvanized steel, and copper wiring is used in electrical connections.

Improved Wetting and Spreading. An added benefit of SPRAYAWAY RDF is that the wetting characteristics the KAc base fluid are significantly enhanced, providing improved spreading and coverage. Additionally, these properties enhance the fluid film adhesion characteristics such that the fluid sticks to the surface and lasts longer between applications.

Rapid Drying Time. SPRAYAWAY RDF exhibits rapid drying characteristics after application, making treated runways available for use in less time. Runway availability is obviously an important issue at high traffic airports.

Environmentally Friendly. SPRAYAWAY RDF is non-toxic and non-hazardous to plant and animal life; in the environment, it biodegrades readily and completely to carbon dioxide and water. It has a very low Biological Oxygen Demand (BOD) and contains no phosphates or urea that tend to promote eutrophication of natural waterways that may subsequently lead to fish-kills.

High Performance. In ice melting tests conducted according to the SHRP H-205.2 method, the performance of SPRAYAWAY RDF potassium acetate fluid is significantly better than propylene glycol/urea (PGU) "fluids used for runway deicing."

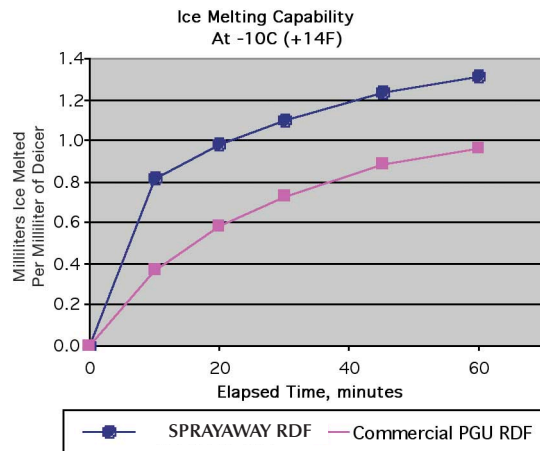

TYPICAL PROPERTIES

Appearance..... Clear Blue Liquid
 Odor Mild, Characteristic
 Specific Gravity 1.282
 Pounds Per Gallon..... 10.7
 Flash Point, COC None
 Water Miscibility Complete
 Freezing Point..... -76°F (-60°C)
 BOD (5-Day), g/g 0.25
 TOD, g/g..... 0.35

APPLICATION

SPRAYAWAY RDF is supplied in a ready to use liquid form, making its application by spray trucks convenient and easy. Suggested rates of application are as follows:

Anti-icing: The most efficient use of SPRAYAWAY RDF is pre-treatment application prior to the start of an icing event at the rate of 0.5 gallons per 1000 ft².

Deicing: SPRAYAWAY RDF is an effective deicer when allowed to penetrate to the pavement surface to break the bond of ice and snow. While the amount of fluid required depends on outside temperature as well as the thickness of the ice film an application of 1.0 gallon per 1000 ft² is recommended for thin ice and 3.0 gallons per 1000 ft² for ice up to an inch thick.


HANDLING AND STORAGE

Refer to material safety data sheet for any details of handling and disposal of waste or spills. Keep containers closed when not in use.

¹ Because of cadmium concerns, Boeing has issued advisories concerning 737 operations in which they specify that planes exposed to potassium acetate are to be taken off-line and washed.

SPRAYAWAY RDF Provides Superior Cadmium Corrosion Protection

Cyclic Immersion Corrosion Test Cadmium Plated Steel

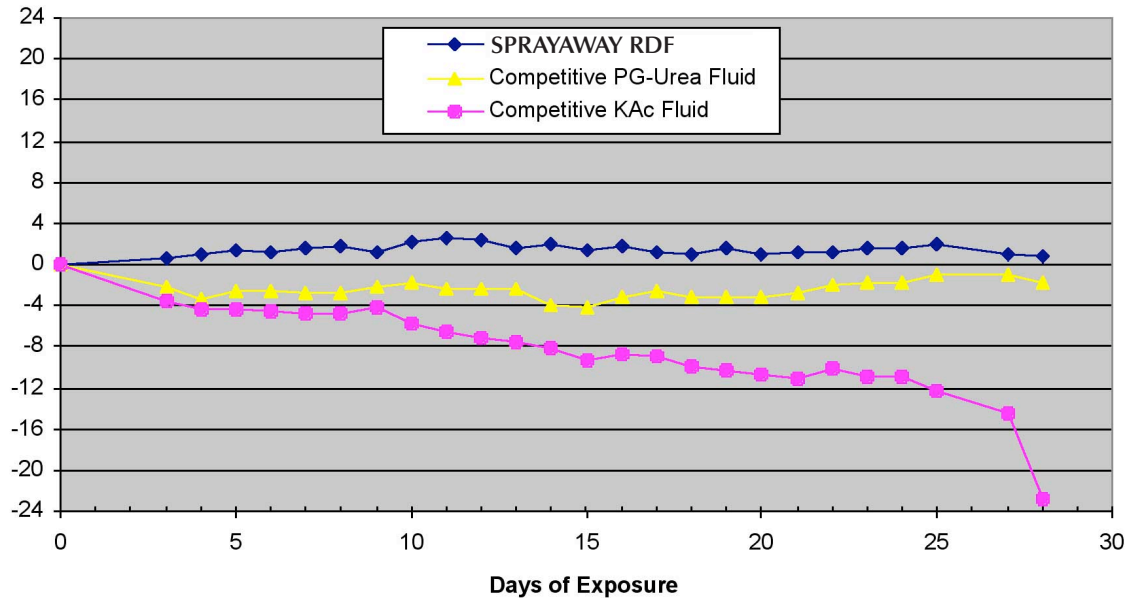

Test Specimens:

4130 Steel, Cadmium plated (Low Hydrogen Embrittlement) per ASTM F1111, size 1" X 2"

Test Procedure:

1. Measure and record pH of solution(s) to be tested.
2. Prepare and test the cadmium plated specimens in accordance with ASTM F1111, except extend the immersion time to 72 hours (instead of 24 hours). Begin the test on a Friday.
3. After immersion, remove specimens without rinsing and place them in small glass or non-reactive plastic containers so that they rest upright at an approximate 45 degree angle. Specimens shall be maintained at room temperature (72 + 5F) and relative humidity (40 + 10%). Maintain the specimens in this condition for 23 hours. This step shall be referred to as the environmental exposure.
4. Rinse specimens with water. Specimens shall be lightly brushed with a soft nylon brush while rinsing. Dry specimens thoroughly by rinsing with a stream of acetone from a wash bottle. Shake free from acetone and dry in a 110oC oven for 1 h and allow to cool to room temperature in a desiccator.
5. Weigh and record specimen weight.
6. Return specimens to solution to soak for 1 hour each weekday.
7. Repeat steps 3 through 6. Maintain specimens in initial orientation.
8. Repeat cycles for 30 days. Report weight changes for each specimen at each time interval. If average weight change exceeds 8.5 mg per 1" x 2" panel (0.3 mg/cm²), testing may be halted.

**QUID AIRPORT RUNWAY DEICING FLUIDS
REQUIREMENTS AND DATA SUMMARY**

SAE AMS 1435A Technical Requirements	Section Number	Test Requirement	ICECLEAR RDF KAc Fluid
Fluid Type		NA	KAc
Appearance	3.1.2	Clear	Clear
Color (If Dyed)	3.1.2	Blue	Blue
Environmental Information	3.1.1		
BOD ₅ @ 20°C	3.1.1.1	Report	0.25 kg/kg
TOD @ 20°C	3.1.1.1	Report	0.35 kg/kg
Daphnia Acute Toxicity, LC50	3.1.1.2	Report	1280 mg/L
Fish Acute Toxicity, LC50	3.1.1.2	Report	2150 mg/L
Trace Contaminants	3.1.1.3		
Sulfur		Report	3 ppm
Halogens		Report	22 ppm
Phosphate		Report	< 1 ppm
Nitrate		Report	< 1 ppm
Lead		Report	< 1 ppm
Chromium		Report	< 1 ppm
Cadmium		Report	< 1 ppm
Mercury		Report	< 1 ppm
Physical Properties	3.2		
Flash Point	3.2.1	> 100°C	Pass
Specific Gravity	3.2.2	Report	1.282
Conductivity, millimhos	NA	Not Established	520
Fluid pH	3.2.3	7.5 – 11.5	10.5
Freezing Point, as supplied	3.2.4	Not Reported	-60°C
Freezing Point, 1:1 dilution	3.2.4	< -14.5°C	-17°C
Sandwich Corrosion	3.2.5.1		
2024 T-3 Bare Anodized		1	1
2024 T-3 Alclad		1	1
7075 T-6 Bare Anodized		1	1
7075 T-6 Alclad		1	1
Total Immersion Corrosion Rate	3.2.5.2	mg/cm ² /24h	
AMS 4037 Al Anodized		< 0.3	< 0.01
AMS 4041 Al Alloy		< 0.3	< 0.01
AMS 4049 Al Alloy		< 0.3	< 0.01
AMS 4376 Mg, Dichromated		< 0.2	0.08
AMS 4911 Ti Alloy		< 0.1	< 0.01
AMS 5045 Carbon Steel		< 0.8	0.02
Galvanized Steel		Not Established	0.05
Copper		Not Established	< 0.01
Low Embrittling Cadmium Plate	3.2.5.3	< 0.3	< 0.01
Hydrogen Embrittlement	3.2.5.4	Pass/Fail	Pass
Stress Corrosion, AMS 4911	3.2.5.5	Pass/Fail	Pass
Stress Corrosion, AMS 4916	3.2.5.5	Pass/Fail	Pass
Effect on Acrylic Plastics	3.2.6	Pass/Fail	Pass
Effect on Polycarbonate Plastics	3.2.6	Pass/Fail	Pass
Effect on Painted Surfaces	3.2.7	Pass/Fail	Pass
Effect on Unpainted Surfaces	3.2.8	Pass/Fail	Pass
Rinsibility	3.2.9	Pass/Fail	Pass
Concrete Scaling Resistance	3.2.10	< 1	Pass
Storage Stability	3.2.11	Pass/Fail	In Process
Polarization Resistance Corrosion Rate (4 day exposure), mils per year	NA		
Galvanized Steel		0.85	0.597
Carbon Steel		Not Established	0.0009
Aluminum 6061 Alloy		Not Established	0.0180
Wetting Characteristics	NA	Not Established	Better than Commercial KAc Fluid
Drying Time	NA	Not Established	Better than Commercial PGU Fluid

SPRAYAWAY RDF

ICE MELTER

Tests with SPRAYAWAY RDF show it readily biodegrades at low temperatures and has a relatively low oxygen demand (BOD) when compared to glycol-based deicers. Toxicity tests rate SPRAYAWAY RDF as “relatively harmless” to aquatic life, the most favorable classification used by the environmental community. And the fluid does not contain nitrogen. Therefore, SPRAYAWAY RDF is considered much safer for the environment than either glycol or urea.

As suggested by federal agencies, the following general summary of environmental and hazard information is provided. More detail is available in the MSDS. Complete test report documentation is available upon request.

BIODEGRADABILITY

The chemical oxygen demand (COD) of SPRAYAWAY RDF was determined using Environmental Protection Agency (EPA) Method 410.1.

COD (TOD) 0.30 g O₂/g

BOD oxygen demand using the method (Hach).

BOD 20@ 2 DEG C = .30g O₂/g

BOD 5@ 10 DEG C = .15g O₂/g

BOD 5@20 DEG C = .14g O₂/g

AQUATIC TOXICITY

Current EPA methods were used for measuring the acute and chronic toxicity of SPRAYAWAY RDF.

TEST

Fathead minnow 7-day chronic >1500

Rainbow trout 96-hour acute >2100

Daphnia magna 48-hour acute >3000

HAZARDOUS COMPONENTS & SHIPPING

The RCRA regulations define hazardous waste in two ways: A listed hazardous waste or a characteristic hazardous waste. SPRAYAWAY RDF is not a listed hazardous waste. A waste may be considered hazardous if it exhibits any one of four characteristics—corrosivity, toxicity, ignitability, or reactivity. A waste is corrosive under RCRA if it has a pH less than or equal to 2.0 or greater than or equal to 12.5. SPRAYAWAY RDF is not RCRA corrosive, toxic, ignitable or reactive, therefore, it is not a characteristic hazardous waste.

SPRAYAWAY RDF contains no hazardous components as described by SARA Title III, Section 302. Nor is SPRAYAWAY RDF designated as a hazardous chemical by the U.S. Department of Transportation. SPRAYAWAY RDF does not contain nitrates.

SPRAYAwayRDF

ICE MELTER

Freeze Point / Dilution Chart for SRAYAWAY RDF

% RDF	FREEZE POINT
0	0
10%	-4C (24.8F)
20%	-7C (19.4F)
40%	-14C (6.8F)
50%	-18C (-0.4F)
60%	-24C (-11.2F)
80%	-40C (-40F)
100%	-60C (-76F)

CENTRAL CONSTRUCTION PRODUCTS INC.